


TOP VIEW


USB Port

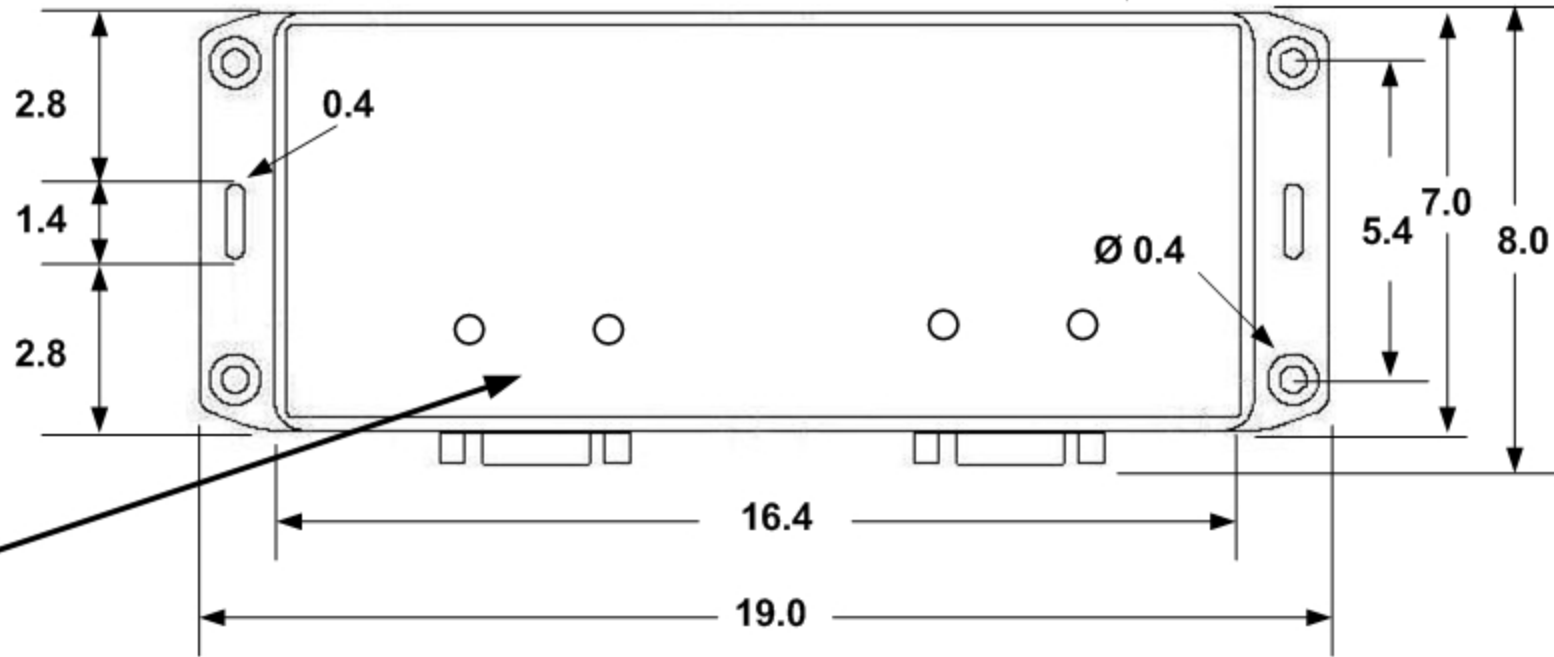

DB9 MALE (DTE)

| PIN | SIGNAL | DIRECTION |
|-----|--------|-----------|
| 1 | DCD | INPUT |
| 2 | RD | INPUT |
| 3 | TD | OUTPUT |
| 4 | DTR | OUTPUT |
| 5 | SG | N/A |
| 6 | DSR | INPUT |
| 7 | RTS | OUTPUT |
| 8 | CST | INPUT |
| 9 | RI | INPUT |

SIDE VIEW

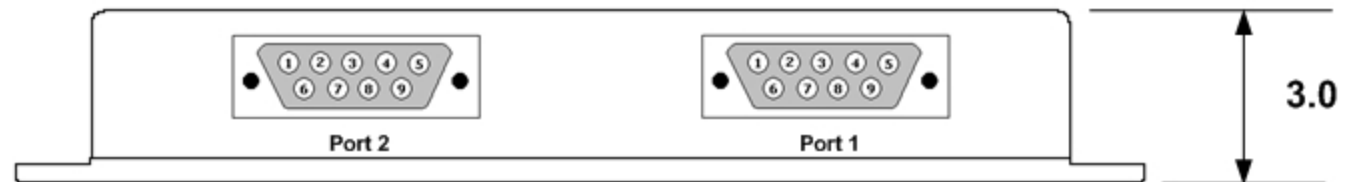

B & B electronics
MANUFACTURING COMPANY

| | |
|--|---------------|
| MODEL: US09ML2-X / US9ML2-X | |
| DATE: 21 SEP 2007 | DRAWN BY: BWF |
| NOTES 2 PORT MODEL DEPICTED | |
| UNITS = CM / TO CONVERT TO IN MULTIPLY BY 0.39 | |