

Graphic OIT

Silver Series

HMI5104XH



**10.4" 65K Color TFT LCD Touchscreen
with 800 x 600 resolution**

- Bright 65,536 (16-Bit) color TFT
- 500MHz fanless CPU
- 256 MB Flash storage, 256 MB data memory
- Built-in Ethernet, serial and USB ports
- Support for Allen-Bradley EtherNet/IP and Modbus TCP/IP
- Up to four protocols simultaneously
- TrueType fonts and international characters
- Data logging/Data sampling
- Alarm and recipe management
- Online/offline simulation
- Most popular PLCs supported
- 2 year warranty



The Silver Series HMI5104XH is a rugged graphic operator interface with a 10.4" 800 x 600 pixel resolution touchscreen TFT display — the same as a 12 inch, but in a 10 inch package. The nominal 2.0" depth makes mounting in tight spots easy. The fanless design means no extra space required for cooling.

The HMI5104XH has a high speed microprocessor and large memory area that are necessary for complex and graphics-intensive projects. The extensive software features allow alarm management, batch recipes, and data logging; making your operator interface a more integral part of your automation control system.

You can easily give your system a professional look with this vivid display, extensive graphic libraries, and the ability to import custom BMPs, JPGs, or animated GIFs.



The HMI5104XH communicates simultaneously with multiple controllers. It is the perfect operator interface solution for your industrial environment in process control, packaging, water treatment, building automation, assembly line controls and many other applications.

The HMI5104XH is reliable, affordable, loaded with features, and easy to use. It is another smart solution from the operator interface experts.

**Every Machine
Needs the
Human Touch**



www.maplesystems.com

HMI5104XH Specifications

Hardware

CPU Type	32-Bit CISC 500MHz fanless CPU
Memory	256MB Flash, 256MB SDRAM
Ethernet Ports	10/100 Base-T (RJ45)
Serial Ports	Com1: RS-232/RS-485, 2 or 4 wire Com2: RS-232 Com3: RS-232/RS-485, 2 wire
USB Ports	2 USB 2.0 Host ports, Type A, 1 Client
Sound Output	Line Out x1 / Mic In x1
RTC	Built-in
SD Card Slot	Yes

Display

Type	10.4" TFT color
Size (WxH)	8.4 x 6.3 inches [213 x 160 mm] 10.4" diagonal
Resolution (pixels)	800 x 600
Brightness (cd/m ²)	400 LED Backlit
Contrast Ratio	400:1
Max Colors	65536 (16 bit)
Viewing Angle (°)	55/65/65/65 (T,B,R,L)
Backlight Longevity	40,000 hrs

Touchscreen

Type	4-wire analog resistive
Resolution	Continuous
Light Transmission	Above 80%
Lifespan	1 million activations minimum

Environmental

Operating Temperature	32 ~ 113°F (0 ~ 45°C)
Storage Temperature	-13 ~ 158°F (-25 ~ 70°C)
Relative Humidity	10% ~ 90% (non-condensing)
Shock (operation)	10 to 25Hz (X,Y,Z direction, 2G, 30 minutes)
Ratings	IP65, NEMA4, NEMA4X (indoor only)
Certifications	CE, EMI FCC Class A, cULus Pending

Specifications subject to change without notice.

Functionality

Networking	Modbus TCP/IP, AB EtherNet/IP, Remote Monitoring
Multiple Port Connectivity	Up to four protocols simultaneously
Data Transfer	Share data between HMIs and PLCs
Data Logging/Sampling	Up to 1000 records Time/Trigger-based
Hardware Options	Mouse, External Keyboard, Memory Storage, Barcode
Windows Fonts	Unicode support International characters
Multiple Languages	Up to 8 languages per object
Security	6 levels, 3 passwords per level Interlock Safety feature Visibility protection
Macros	Math functions, 32-bit Float support
Recipe Management	Up to 32,767 records Index Feature
Alarm Management	Four priority levels Organize by category Real-Time or History
Trending	Up to 20 channels Real-Time or History Time/Date Capture Watch Line Feature
Ease of Use	Popup windows Offline/Online Simulation Extensive Graphics Libraries PLC pass-through mode

Mechanical

Enclosure	Plastic molding
Dimensions (WxHxD)	11.27 x 8.38 x 1.97 inches [286 x 213 x 50 mm]
Panel Cutout Dim. (WxH)	10.20 x 7.91 inches [259 x 201 mm]
Weight	3.4 lbs [1.6 kg]
Mounting	Panel mount or VESA 75 compatible
Power Requirements	24VDC, 1.25A
Warranty	2 years

Order Number

HMI5104XH	10.4" TFT Graphic OIT
-----------	-----------------------

Secure online ordering 24/7/365 from



B&B electronics
MANUFACTURING COMPANY

International Headquarters:
707 Dayton Road - P.O. Box 1040
Ottawa, IL 61350 USA

www.bb-elec.com
815-433-5100 Fax 815-433-5104
orders@bb-elec.com support@bb-elec.com

European Headquarters:
Westlink Commercial Park
Oranmore, Co. Galway, Ireland
www.bb-europe.com
+353 91 792444 Fax +353 91 792445
orders@bb-europe.com support@bb-europe.com

HMI5104XH Dimensions

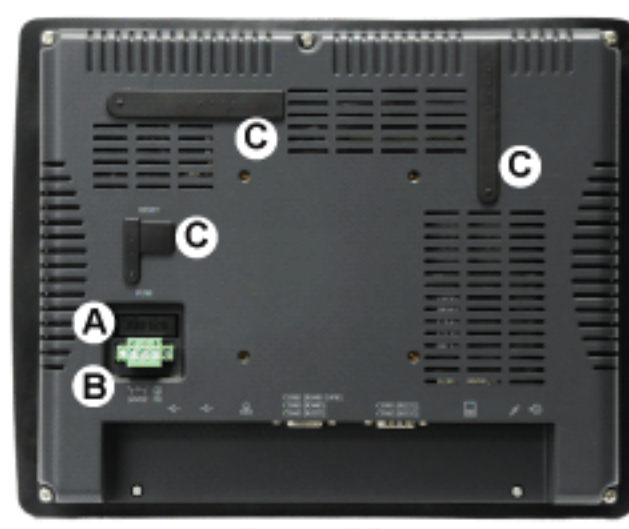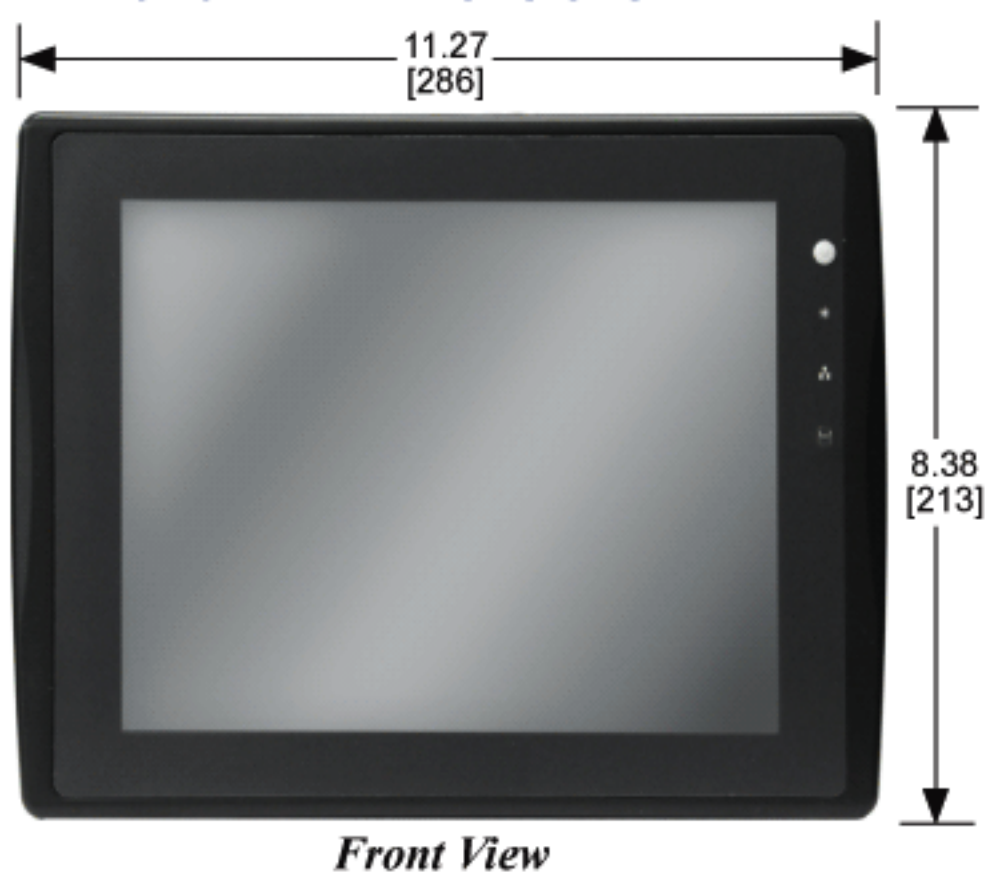

- A Fuse
- B Power Connector
- C Dust Covers
- D USB 2.0 Client
- E 2x USB Host
- F Ethernet Port 10/100
- G Com Port DB9S
- H Com Port DB9P
- I SD Card Slot
- J Mic In
- K Line Out

Dimensions in inches [mm]