


RS-232 Tester CE

Model 232MTT

The RS-232 Tester is designed to be connected in series with any RS-232 interface. It is used to test the interface for failures and to help identify the equipment that has failed. The Tester may be left in the line permanently. The seven LED's indicate the status of the following lines:

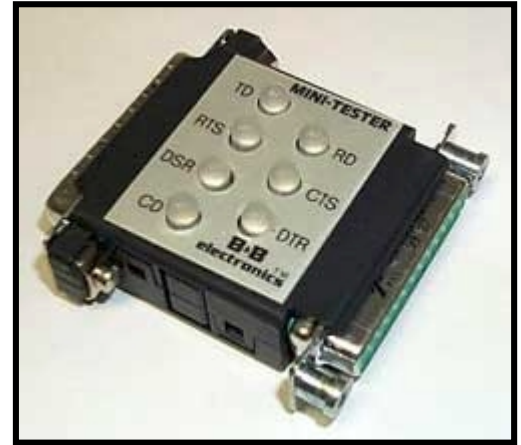

Pin No.:	Signal:	Description:
2.....	TD.....	Transmit Data
3.....	RD.....	Receive Data
4.....	RTS.....	Request To Send
5.....	CTS.....	Clear To Send
6.....	DSR.....	Data Set Ready
8.....	CD.....	Carrier Detect
20.....	DTR.....	Data Terminal Ready

Two Color Testers (Clear LED's):

Negative Voltage = Mark = LED Red
 Positive Voltage = Space = LED Green

DECLARATION OF CONFORMITY	
Manufacturer's Name:	B&B Electronics Manufacturing Company
Manufacturer's Address:	P.O. Box 1040 707 Dayton Road Ottawa, IL 61350 USA
Model Numbers:	232MTT
Description:	RS-232 Tester
Type:	Light industrial ITE equipment
Application of Council Directive:	89/336/EEC
Standards:	EN 50082-1 (IEC 801-2, IEC 801-3, IEC 801-4) EN 50081-1 (EN 55022, IEC 1000-4-2) EN 61000 (-4-2, -4-3, -4-4, -4-6, -4-8) ENV 50204
 Michael J. Fahrion, Director of Engineering	
	

© 1993 B&B Electronics -- Revised January 2000

This product designed and manufactured in USA of domestic and imported parts by

B & B Electronics Mfg. Co.
 707 Dayton Road - P.O. Box 1040 - Ottawa, IL 61350 USA
 Phone: (815) 433-5100 - Fax: (815) 433-5105
 Home Page: www.bb-elec.com
 Sales e-mail: sales@bb-elec.com - Fax: (815) 433-5109
 Technical Support e-mail: support@bb-elec.com - Fax: (815) 433-5104

B & B Electronics Ltd
 Westlink Commercial Park - Oranmore, Co. Galway - Ireland
 Phone: +353 91 792444 - Fax: +353 91 792445
 Home Page: www.bb-europe.com
 Sales e-mail: sales@bb-europe.com
 Technical Support e-mail: support@bb-europe.com