

RS-422/485 Serial Cards CE

Models: 422ICCA & 422ICCB


Description

The B&B Electronics' 422ICC RS-422/RS-485 serial interface cards are designed for the IBM PC, XT, AT and compatibles. RS-530 DB25 male connector is used. The 422ICCA uses a 16550 UART while the Model 422ICCB uses a 16850 UART with a 128 byte transmit and receive FIFO.

A jumper is provided to disable all handshake lines inputs (force them true) for use in TD and RD only systems.

Features

- Jumper selectable addresses: COM1, COM2, COM3, & COM4
- Jumper selectable interrupts: 2, 3, 4, 5, 6, 7
- Supports following serial lines: TD, RD, RTS, CTS, DSR, DCD, and DTR
- Jumper selectable RS-422 and RS-485 modes

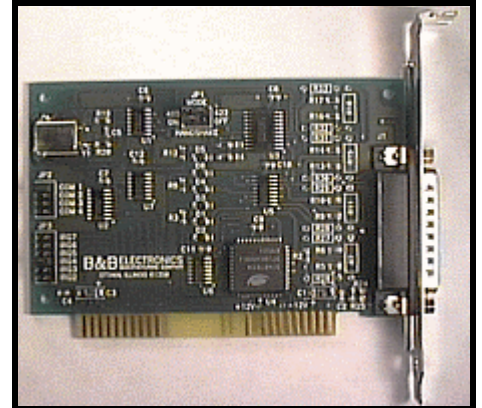

Specifications

Bus: IBM PC ISA Bus. 27"
Dimensions: 4.8" x 3.2" (12.2 x 8.1 cm)
I/O connection: DB-25 male, RS-530 compatible
Baud rates: 1 - 115,200 Baud
Character length: 5, 6, 7, or 8 bits
Parity: Even, odd or none
Stop bits: 1, 1.5, or 2
Interrupt: IRQ 2, 3, 4, 5, 6, and 7

DECLARATION OF CONFORMITY

Manufacturer's Name:	B&B Electronics Manufacturing Company
Manufacturer's Address:	P.O. Box 1040 707 Dayton Road Ottawa, IL 61350 USA
Model Numbers:	422ICCA, 422ICCB
Description:	RS-232 Serial Card
Type:	Light industrial ITE equipment
Application of Council Directive:	89/336/EEC
Standards:	EN 50082-1:1992 IEC 801 (-2, -3, -4) EN 61000 (-4-2, -4-3, -4-4, -4-6) EN 50082-1:1998

Michael J. Fahrion, Director of Engineering



© B&B Electronics -- Revised August 2001

This product designed and manufactured in USA of domestic and imported parts by

B & B Electronics Mfg. Co.

707 Dayton Road - P.O. Box 1040 - Ottawa, IL 61350 USA
Phone: (815) 433-5100 - Fax: (815) 433-5105

Home Page: www.bb-elec.com

Sales e-mail: orders@bb-elec.com - Fax: (815) 433-5109

Technical Support e-mail: support@bb-elec.com - Fax: (815) 433-5104

B & B Electronics Ltd

Westlink Commercial Park - Oranmore, Co. Galway - Ireland
Phone: +353 91 792444 - Fax: +353 91 792445

Home Page: www.bb-europe.com

Sales e-mail: orders@bb-europe.com

Technical Support e-mail: support@bb-europe.com